


Fitting and Operating Instructions
for Series 40 Garage Side Door NT60

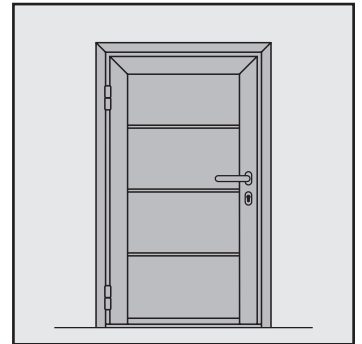

CONTENTS

1. Important instructions
2. Fitting
3. Care and maintenance

1 IMPORTANT INSTRUCTIONS

Read and follow these instructions carefully. They provide you with important information on the specialist fitting, care and maintenance of your side door.

Keep these instructions safe for later reference!



Attach all the fixings listed in the fitting instructions!

- Until building work is completed, protect your door using a suitable covering to prevent damage. Please note, however, that adhesive tape, particularly if exposed to the sun for long periods, can leave marks or damage the surface coating.
- Protect the door against aggressive and caustic substances.

Liability

Non-compliance with these instructions and the following information will exempt the manufacturer from all liability.

The door can be easily and correctly fitted by carefully following these step-by-step instructions:

2 FITTING

- Plug holes in the door frame pre-drilled by the manufacturer in accordance with the order.

In the threshold region you have the following options:

- Threshold for unfinished floor
The floor profile is subsequently concealed by the screed
- Threshold for finished floor
Unscrew the floor profile and fasten the door's threshold profile on site.

3 CARE AND MAINTENANCE

Clear water is sufficient for cleaning and care.

Warm water with a neutral, non-abrasive cleaner can be used (house-hold detergent, pH value 7) if the doors are more heavily soiled. To preserve the surface quality regular **cleaning must be carried out at least once every 3 months.**

Rubbing down the panes will cause scratches.

For this reason, fluid should always be used when cleaning. Only use soft cloths or window leathers. Rinse away particles of dust and dirt with water before rubbing down.

Lock

Once to twice a year check and maintain the lock and profile cylinder to ensure that the door always closes easily and quietly:

- Grease the back of the lock latch with vaseline
- For the profile cylinder spray a special lubricant into the keyway (obtainable from specialist dealers).



Never apply oil to the profile cylinder! Otherwise this could impair the closing function.

Door hinges

The door hinges are maintenance-free.



Never grease the hinges! Otherwise this will cause the bearings to wear.

Copyright.

No reproduction even in part is allowed without our permission. All details subject to change.